



Sirocco Aero mini Installation Instructions




Thank you for choosing this Controltech. With proper care and installation, it will give you trouble-free, enjoyable use.

In order to maximize the safe enjoyment of this product, you should read and carefully follow the following installation instructions and warnings. Failure to do so could result in unexpected wear and/or failure, possibly resulting in injury.

Controltech warrants this product to be free from defects in materials and workmanship for a period of two years from the date of purchase when purchased from an authorized Controltech dealer. This warranty is extended only to the original owner of the product and is not transferable. Proof of purchase is required for any warranty service, so be sure to keep your receipt.

This warranty does not cover cosmetic or structural damage arising from misuse or abuse, including damage caused by crashes, jumping and landing, front end impact, falls or any other collision, owner neglect of regular maintenance, improper installation of parts and accessories. Controltech makes no warranty if modifications, changes, additions or substitutions are made to any components. Wear from normal use or exposure to environmental elements is not covered by this warranty. Controltech makes no warranty against any incidental or consequential damage to bike or parts, or rider injury caused by defects as covered in this warranty.

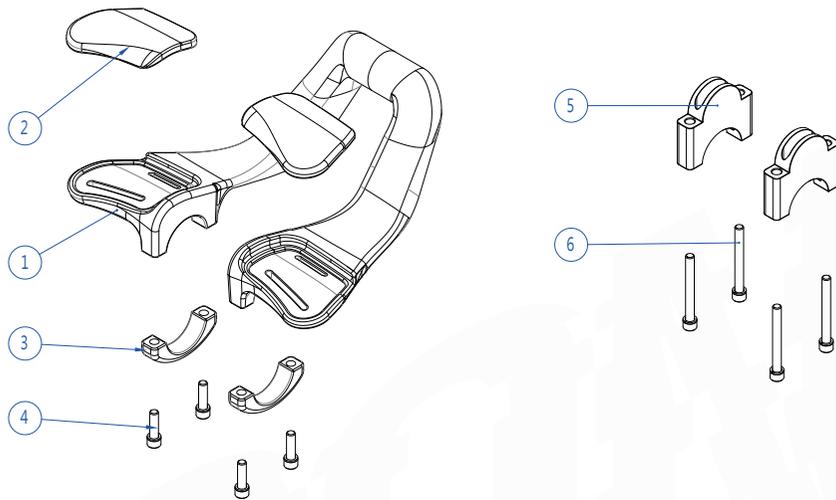

Model name / Model no.



Sirocco Aero mini / TTH-27

Part

- ① Clip-on body x1
- ② Elbow pad x2
- ③ Clamp x2
- ④ M5 screw x4 (Length 22mm)

Accessory (Optional)

- ⑤ 30mm Riserx2
- ⑥ M5 screw x4 (Length 50mm)

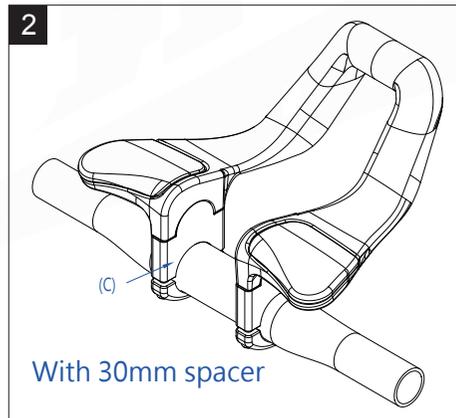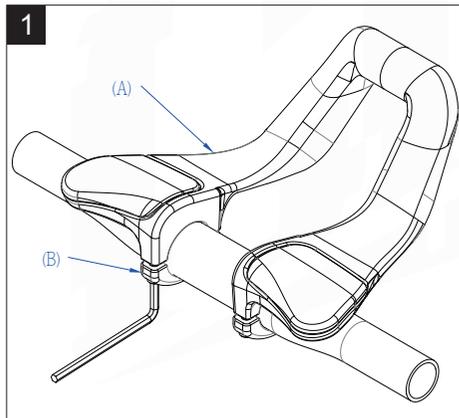

Installation

1. Please check if you have all the required parts.
2. This product must be assembled on the rails of the saddle.
3. Clamp the cage onto the rails with your preferable angle, and fix it.
4. You can also adjust the height of the cages. Loose the screws, adjust the height and fix the screws.



Sirocco Aero mini Installation Instructions



Thank you for choosing this Controltech. With proper care and installation, it will give you trouble-free, enjoyable use.

In order to maximize the safe enjoyment of this product, you should read and carefully follow the following installation instructions and warnings. Failure to do so could result in unexpected wear and/or failure, possibly resulting in injury.

Controltech warrants this product to be free from defects in materials and workmanship for a period of two years from the date of purchase when purchased from an authorized Controltech dealer. This warranty is extended only to the original owner of the product and is not transferable. Proof of purchase is required for any warranty service, so be sure to keep your receipt.

This warranty does not cover cosmetic or structural damage arising from misuse or abuse, including damage caused by crashes, jumping and landing, front end impact, falls or any other collision, owner neglect of regular maintenance, improper installation of parts and accessories. Controltech makes no warranty if modifications, changes, additions or substitutions are made to any components. Wear from normal use or exposure to environmental elements is not covered by this warranty. Controltech makes no warranty against any incidental or consequential damage to bike or parts, or rider injury caused by defects as covered in this warranty.

The procedure of elbow pad replacement of Sirocco Aero mini




① Cleanse the contact surface between elbow pad and chassis.



② Remove the protective layer of the double-sided tape at the back of elbow pad.



③ Align the rib at the back of elbow pad with the groove of the Sirocco aero mini.

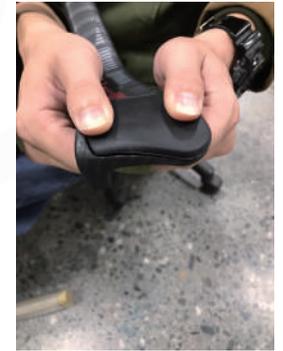

④ Press the elbow pad to squeeze the elbow pad into the groove.



⑤ Use steel ruler or similar tool to needle-pick the rib of the elbow pad to ensure the elbow pad is thoroughly installed.



⑥ Repeat the procedure for both ribs.



⑦ Repeat this procedure for both ride and left elbow pad.



⑨ The elbow pad replacement is complete.




說明

感謝購買Controltech產品。請詳讀此安裝說明書並遵循正確使用方式，若沒有遵從說明書警告事項而導致產品損壞則不再保固範圍內。

保固

從購買日起Controltech提供兩年產品保固。消費者請保留產品保證書或相關的購買證明(如發票或收據)。產品在保固期內有需要維修服務時，煩請提出保證書或相關購買證明。

Controltech保固不包括錯誤或惡意之損壞，也不包含跳躍摔倒降落衝擊或其他的碰撞，以及忽視定期保養和錯誤零件組裝。另外，私自改裝、增加或替換產品上的零件，是不包含在保固內。自然的損壞也不包含在保固範圍內。

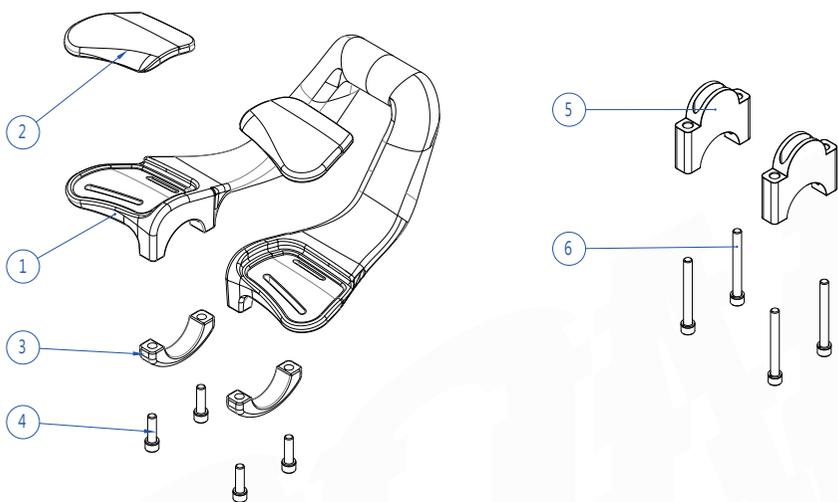

產品名稱 / 型號


Sirocco Aero mini / TTH-27

零件名稱

- ① U型短把主體x1。
- ② 手肘靠墊x2。
- ③ 下蓋x2。
- ④ M5螺絲x4(22mm)。

配件 (須單獨購買)

- ⑤ 30mm墊片x2。
- ⑥ M5螺絲x4(50mm)。

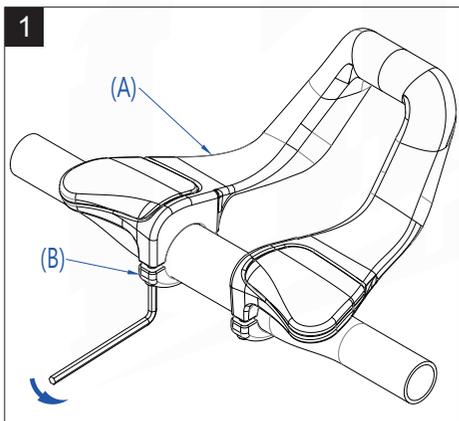

安裝說明

1. 安裝前請檢查您的產品配件是否齊全。
2. 將(A)把手固定於車把手中段，並組裝(B)下蓋。
3. 調整主體角度，使其符合您喜歡的角度。
4. 將螺絲旋緊(鎖固最大扭力值5Nm)
5. 將(C)30mm墊片可供較舒適的騎乘姿勢。



說明

感謝購買Controltech產品。請詳讀此安裝說明書並遵循正確使用方式，若沒有遵從說明書警告事項而導致產品損壞則不再保固範圍內。

保固

從購買日起Controltech提供兩年產品保固。消費者請保留產品保證書或相關的購買證明(如發票或收據)。產品在保固期內有需要維修服務時，煩請提出保證書或相關購買證明。

Controltech保固不包括錯誤或惡意之損壞，也不包含跳躍摔倒降落衝擊或其他的碰撞，以及忽視定期保養和錯誤零件組裝。另外，私自改裝、增加或替換產品上的零件，是不包含在保固內。自然的損壞也不包含在保固範圍內。

TTH-27軟墊，安/換裝步驟說明書



① 將手肘版擦拭乾淨。



② 將軟墊的雙面膠保護紙撕掉。



③ 將軟墊放在手肘版上，並對準槽穴。



④ 用手按壓，使軟墊的肋條確實精準的進入手肘版的槽孔中。



⑤ 用小鋼尺插入軟墊及手肘版間，將軟墊肋條往上翹起，使肋條能高於手肘墊的表面。



⑥ 短槽孔也要把肋條翹出手肘版的版面。



⑦ 右邊軟墊 安/換裝完成。



⑧ 左邊軟墊，安/換裝的步驟與右邊相同。



⑨ 完成軟墊安/換裝。