



LYNX -5° Di2 Stem Installation Instructions



說明

感謝購買Controltech產品。請詳讀此安裝說明書並遵循正確使用方式，若沒有遵從說明書警告事項而導致產品損壞則不再保固範圍內。

保固

從購買日起Controltech提供兩年產品保固。消費者請保留產品保證書或相關的購買證明 (如發票或收據)。產品在保固期內有需要維修服務時，煩請提出保證書或相關購買證明。




Controltech保固不包括錯誤或惡意之損壞，也不包含跳躍摔倒降落衝擊或其他的碰撞，以及忽視定期保養和錯誤零件組裝。另外，私自改裝、增加或替換產品上的零件，是不包含在保固內。自然的損壞也不包含在保固範圍內。

產品名稱 / 型號

LYNX -5° Di2 Stem / RAS-96 Di2

零件名稱

- ① 立管本體
- ② 立管前蓋
- ③ 前叉束上蓋x1。
- ④ M6螺絲x1。
- ⑤ 中管鎖片x1。
- ⑥ M5螺絲x6

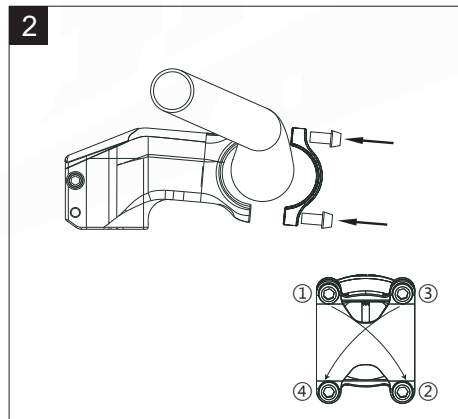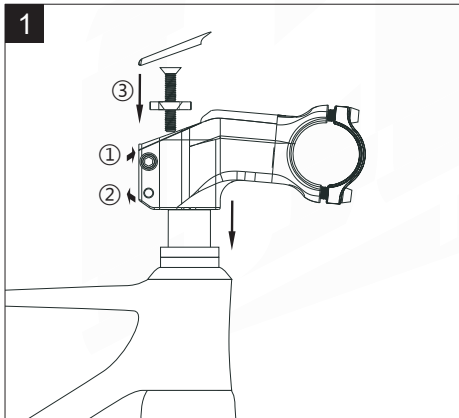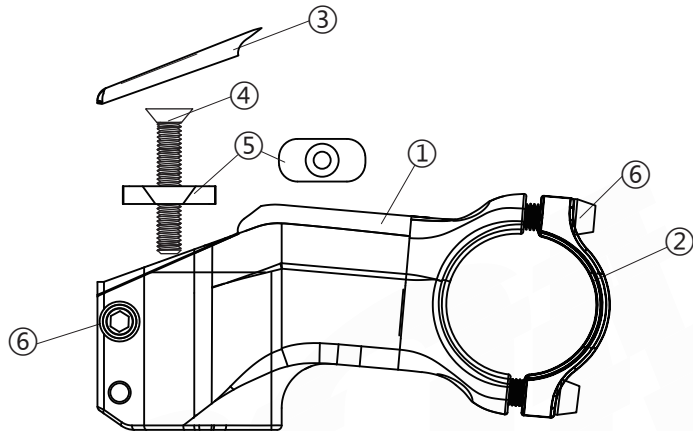

安裝說明

1. 開始組裝前，請先確認車把手中段處尺寸和立管車手束內徑一樣，是的話請繼續下一步。
2. 檢查產品外觀是否整潔或有任何粗糙瑕疵，為避免傷及產品。有的話請拿到經銷商修理或將瑕疵移除。
3. 請確認立管車手束上的螺絲有上潤滑油。
4. 請將立管前叉束組裝於前叉管，依所組裝車種需求調整其正負角度並依個人使用習慣放置墊圈調整高度，安裝前叉束上蓋並鎖上上蓋螺絲(施以適當力量勿鎖緊)，調整好車手立管前叉位置後依立管標示之扭力將前叉束鎖緊，並將碗組上蓋鎖緊。 **1**
5. 組裝時請把立管前蓋卸下，再將立管置於車把手中段正中央處，將立管前蓋鎖上，請上下對角平均鎖固，鎖入間隙平均，鎖固最大扭矩值請依產品標示為準。並請依據立管標示之最大扭矩值施以鎖緊力量。 **2**





LYNX -5° Di2 Stem Installation Instructions



Thank you for choosing this Controltech. With proper care and installation, it will give you trouble-free, enjoyable use.

In order to maximize the safe enjoyment of this product, you should read and carefully follow the following installation instructions and warnings. Failure to do so could result in unexpected wear and/or failure, possibly resulting in injury.

Controltech warrants this product to be free from defects in materials and workmanship for a period of two years from the date of purchase when purchased from an authorized Controltech dealer. This warranty is extended only to the original owner of the product and is not transferable. Proof of purchase is required for any warranty service, so be sure to keep your receipt.




This warranty does not cover cosmetic or structural damage arising from misuse or abuse, including damage caused by crashes, jumping and landing, front end impact, falls or any other collision, owner neglect of regular maintenance, improper installation of parts and accessories. Controltech makes no warranty if modifications, changes, additions or substitutions are made to any components. Wear from normal use or exposure to environmental elements is not covered by this warranty. Controltech makes no warranty against any incidental or consequential damage to bike or parts, or rider injury caused by defects as covered in this warranty.

產品名稱 / 型號

LYNX -5° Di2 Stem / RAS-96 Di2

Components

- ① Stem Body x1
- ② Stem Face Plate x1
- ③ Upper Cap x1
- ④ M6 Fixing Bolts x1
- ⑤ Fixing Cap x1
- ⑥ M5 Fixing Bolts x6

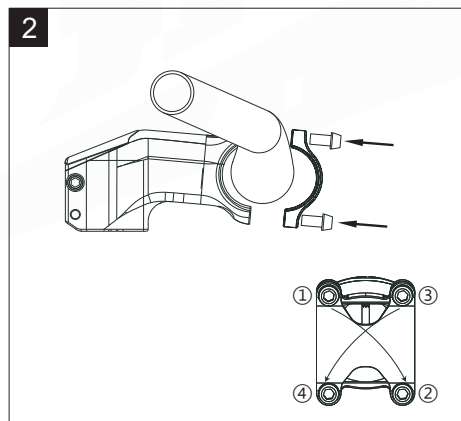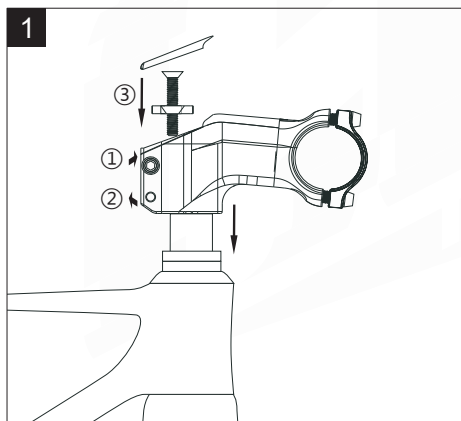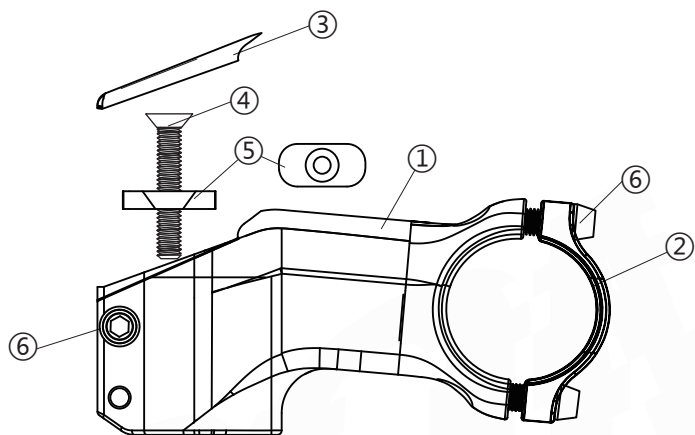

Stem Installation Instructions:

1. Ensure the clamping area of your handlebar fits the bar bore of your stem.
2. Inspect the stem for any defectives before installation and please contact the dealer or distributor if any.
3. Ensure the faceplate bolts are lubricated by grease.
4. Put the ① stem body on the steerer tube and align the stem to the fork. Insert the ⑤ fixing cap into the steerer tube and tighten ④ M6 Fixing Bolt by torque 8Nm.
5. Tighten ⑥ M5 fixing bolts by torque 6Nm to fix the stem body and steerer tube.
6. Press ③ upper cap to the stem body.
7. Disassemble ② faceplate and align the handlebar and stem body correctly.
8. Tighten ⑥ M5 fixing bolts by torque 6Nm to fix the handlebar and stem body.